

LASER DISTANCE METER

MS6414 / MS6416 / MS6418 / MS64100

MS6414

DISTANCE
0.05m~40m



MS6416

DISTANCE
0.05m~60m



MS6418

DISTANCE
0.05m~80m



MS64100


DISTANCE
0.05m~100m



NEW



Specifications	MS6414	MS6416	MS6418	MS64100
Specifications				
Distance	0.05~40m/2~131'	0.05~60m/2~197'	0.05~80m/2~263'	0.05~100m/2~329'
Accuracy	±1.5mm/± 0.06"	±1.5mm/± 0.06"	±1.5mm/± 0.06"	±1.5mm/± 0.06"
Unit	meter/inch/feet	meter/inch/feet	meter/inch/feet	meter/inch/feet
Length	9999m	9999m	9999m	9999m
Area	99999m ²	99999m ²	99999m ²	99999m ²
Volume	99999m ³	99999m ³	99999m ³	99999m ³
Features				
Laser	Assisted laser ray measurements			
APO	Auto Power Off			
Data Logging	99 groups			
Area & Volume	Area & Volume Calculation			
Foot level	Auxiliary foot level measurement			
Backlight	Display Backlight			
General				
Power Supply	3×1.5V AAA Batteries			
Product Size	120×60×28mm/4.2"×2.2"×0.9"			
Product Weight	175g/0.4lb			
Safety Rating	CE(EMC) RoHS			

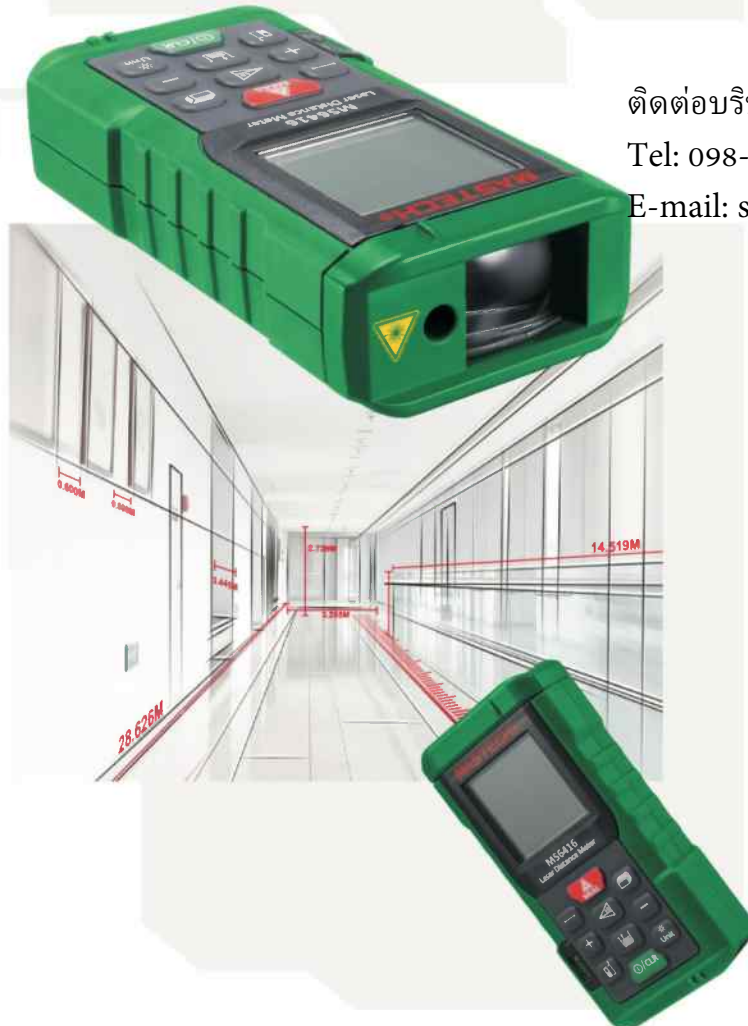

ติดต่อบริษัท เนโอเนิกส์ จำกัด

Tel: 098-479-5684 หรือ 061-8268939

E-mail: sale@neonics.co.th หรือ sale@tools.in.th

ULTRASONIC DISTANCE METER

MS6450



Specifications	MS6450	
Specifications	Range	Accuracy
Distance	0.6m~15m (2 feet~50 feet)	±(0.5% ±1)
Unit	m/feet	●
Length	9999m	●
Area	99999m ²	●
Volume	99999m ³	●
Features		
Laser	Assisted laser ray measurements	
MEM	Input & Recall	
FT/M	Feet/Meter Conversion	
Area & Volume	Area & Volume Calculation	
Backlight	Display Backlight	
General		
Power Supply	1×9V 6F22 Battery	
Product Size	136mm×59mm×38mm/5.4"×2.3"×1.5"	
Product Weight	117g/0.26lb	
Safety Rating	CE(EMC) ETL RoHS	

LINE ID: @neonics



MS6450

DISTANCE
0.6m~15m

